



DC-7 SERIES

FLAMMABLE MATERIAL LOCATIONS

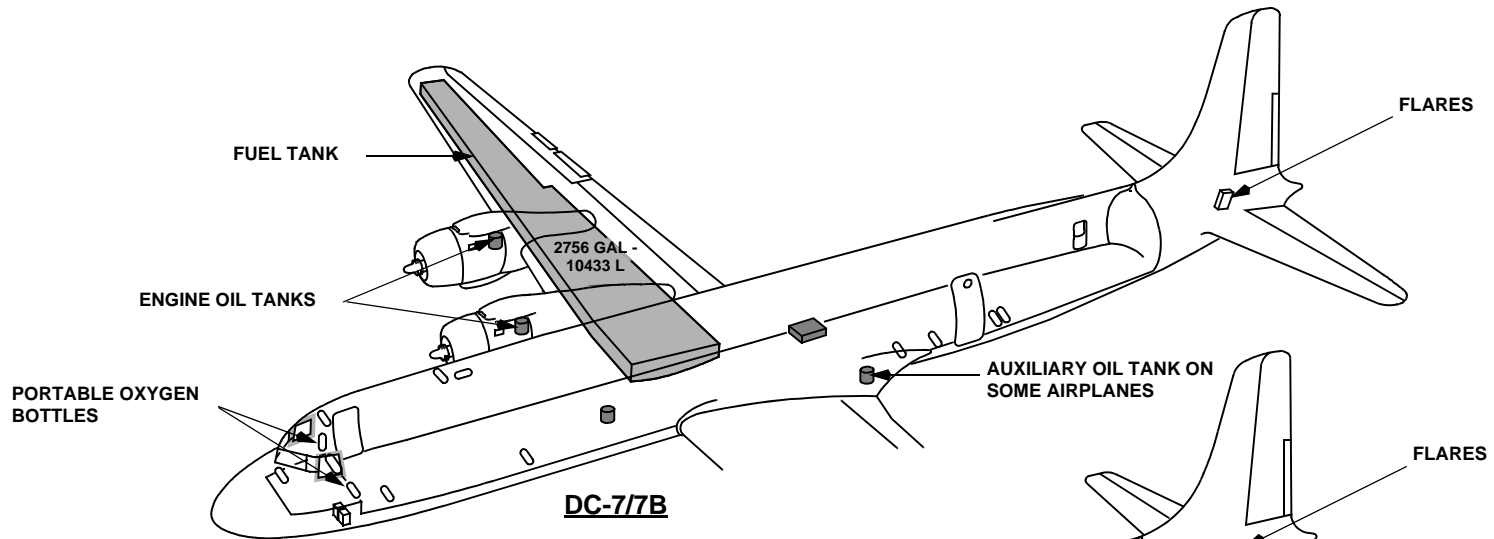

**WARNING:** Approach landing gear trucks from forward or aft when fighting a wheel fire, as wheels and tires may explode.

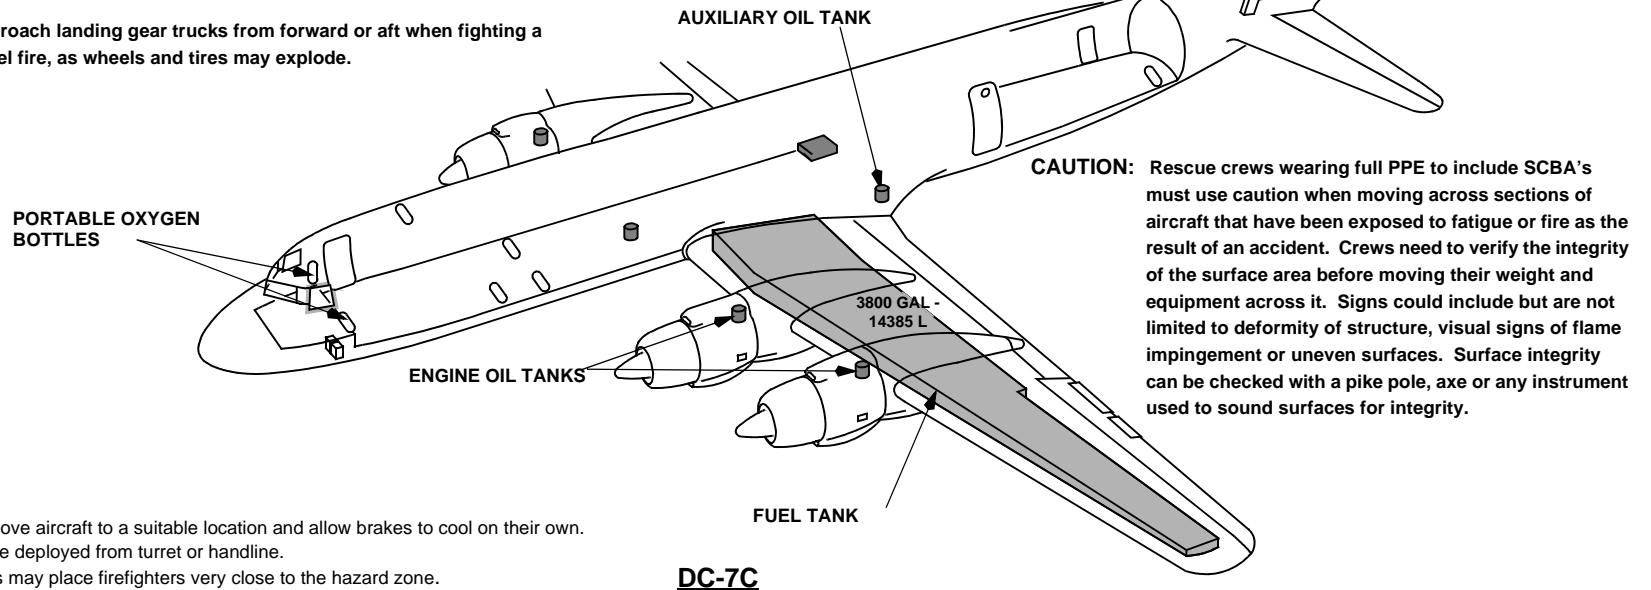

**CAUTION:** Rescue crews wearing full PPE to include SCBA's must use caution when moving across sections of aircraft that have been exposed to fatigue or fire as the result of an accident. Crews need to verify the integrity of the surface area before moving their weight and equipment across it. Signs could include but are not limited to deformity of structure, visual signs of flame impingement or uneven surfaces. Surface integrity can be checked with a pike pole, axe or any instrument used to sound surfaces for integrity.

HOT BRAKES

Normal cooling: Move aircraft to a suitable location and allow brakes to cool on their own.

Water mist: Can be deployed from turret or handline.

Fans: Placing fans may place firefighters very close to the hazard zone.

WHEEL FIRE

Apply large amounts of water initially with turrets. Transition to handline application to continue and maintain a cooling effect.

**Wheels are equipped with fusible plugs designed to melt and deflate the tire when the temperature is excessive.**

# DC-7 SERIES


# EMERGENCY RESCUE ACCESS

## 1 CREW AND MAIN CABIN DOORS EXTERNAL HANDLE




TO OPEN DOOR:  
 1. ROTATE HANDLE COUNTERCLOCKWISE.  
 2. PULL DOOR OUTWARD.

## 2 EMERGENCY EXIT DOORS EXTERNAL HANDLE




TO OPEN DOOR:  
 1. PULL HANDLE OUT.  
 2. PUSH DOOR INWARD.

## 3 ESCAPE HATCH EXTERNAL HANDLE

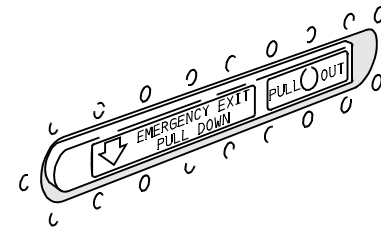

TO OPEN HATCH:  
 1. PULL HANDLE OUT.  
 2. ROTATE HANDLE COUNTERCLOCKWISE.  
 3. PULL HATCH OUT.


## 4 CHOP OUT AREAS

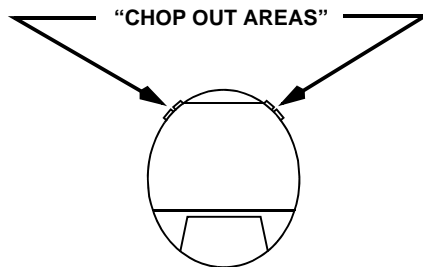

NOTE: "CHOP OUT" AREAS REQUIRE METAL CUTTING PORTABLE POWER EQUIPMENT. BECAUSE OF TYPE OF STRUCTURE AND POSSIBLE INJURY TO PERSONNEL WITHIN, IT IS RECOMMENDED THAT MAJOR EFFORT TO GAIN ACCESS BE DIRECTED TO HATCHES AND DOORS. URGENCY OF SITUATION WILL DICTATE NECESSITY FOR "CHOP OUT."


DC-7 SERIES

EMERGENCY RESCUE ACCESS

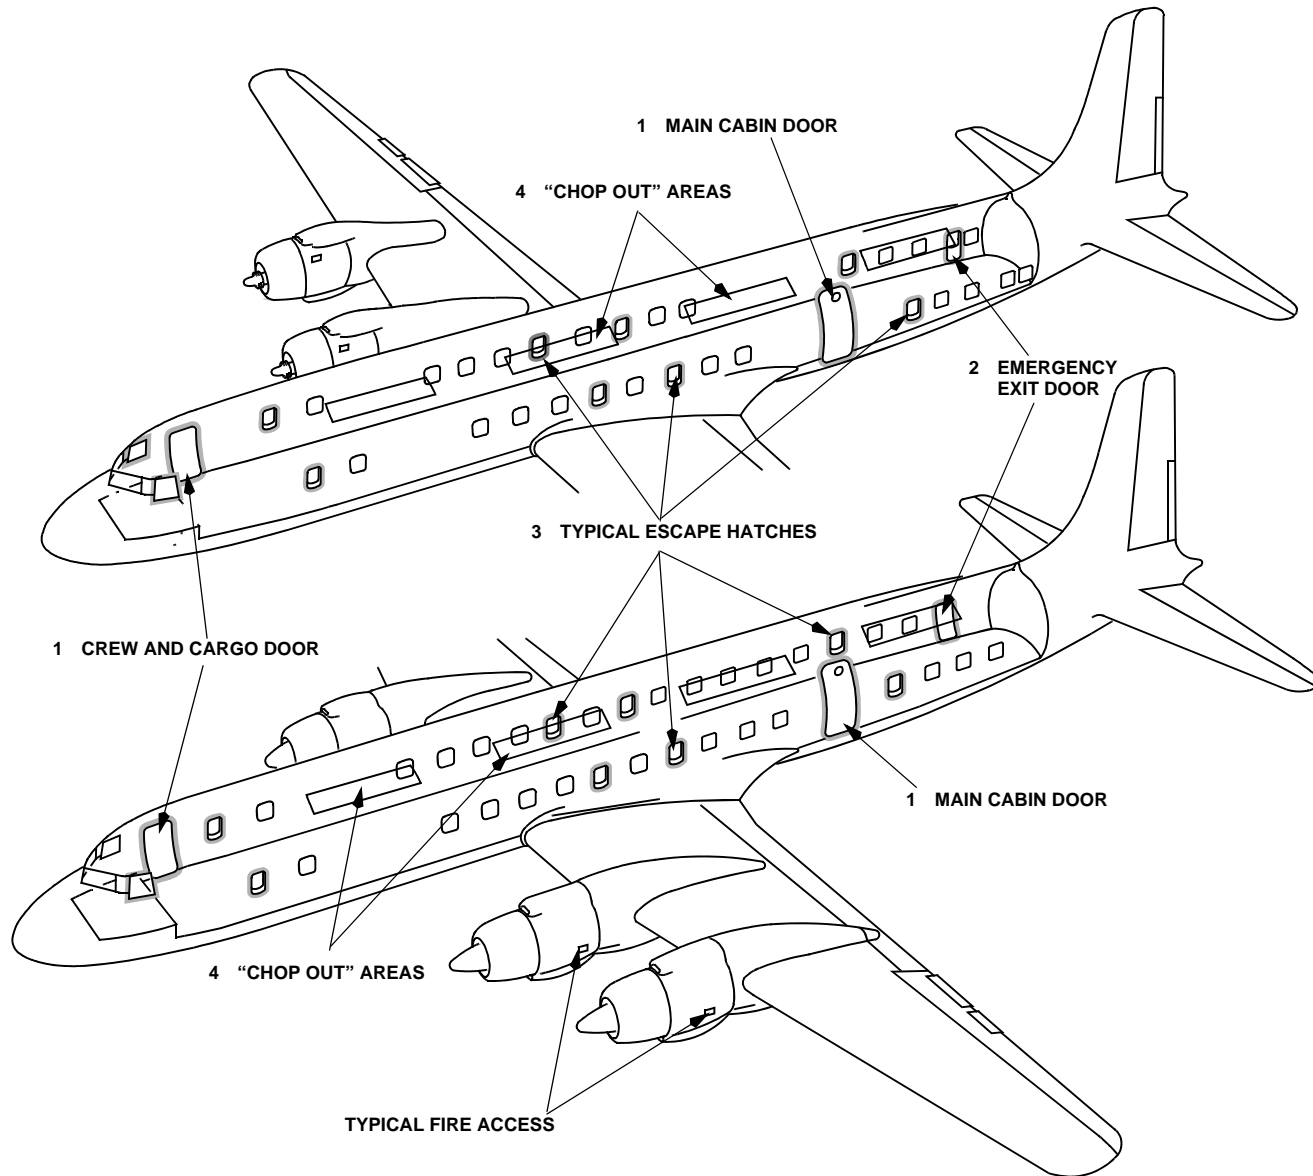

**DC-7 SERIES**


**BATTERY LOCATIONS**

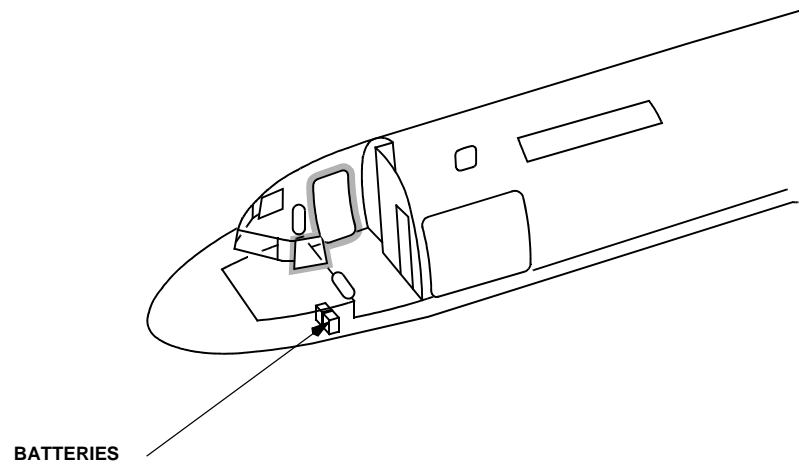

# DC-7 FREIGHTER SERIES

# FLAMMABLE MATERIAL LOCATIONS

**WARNING:** Approach landing gear trucks from forward or aft when fighting a wheel fire, as wheels and tires may explode.

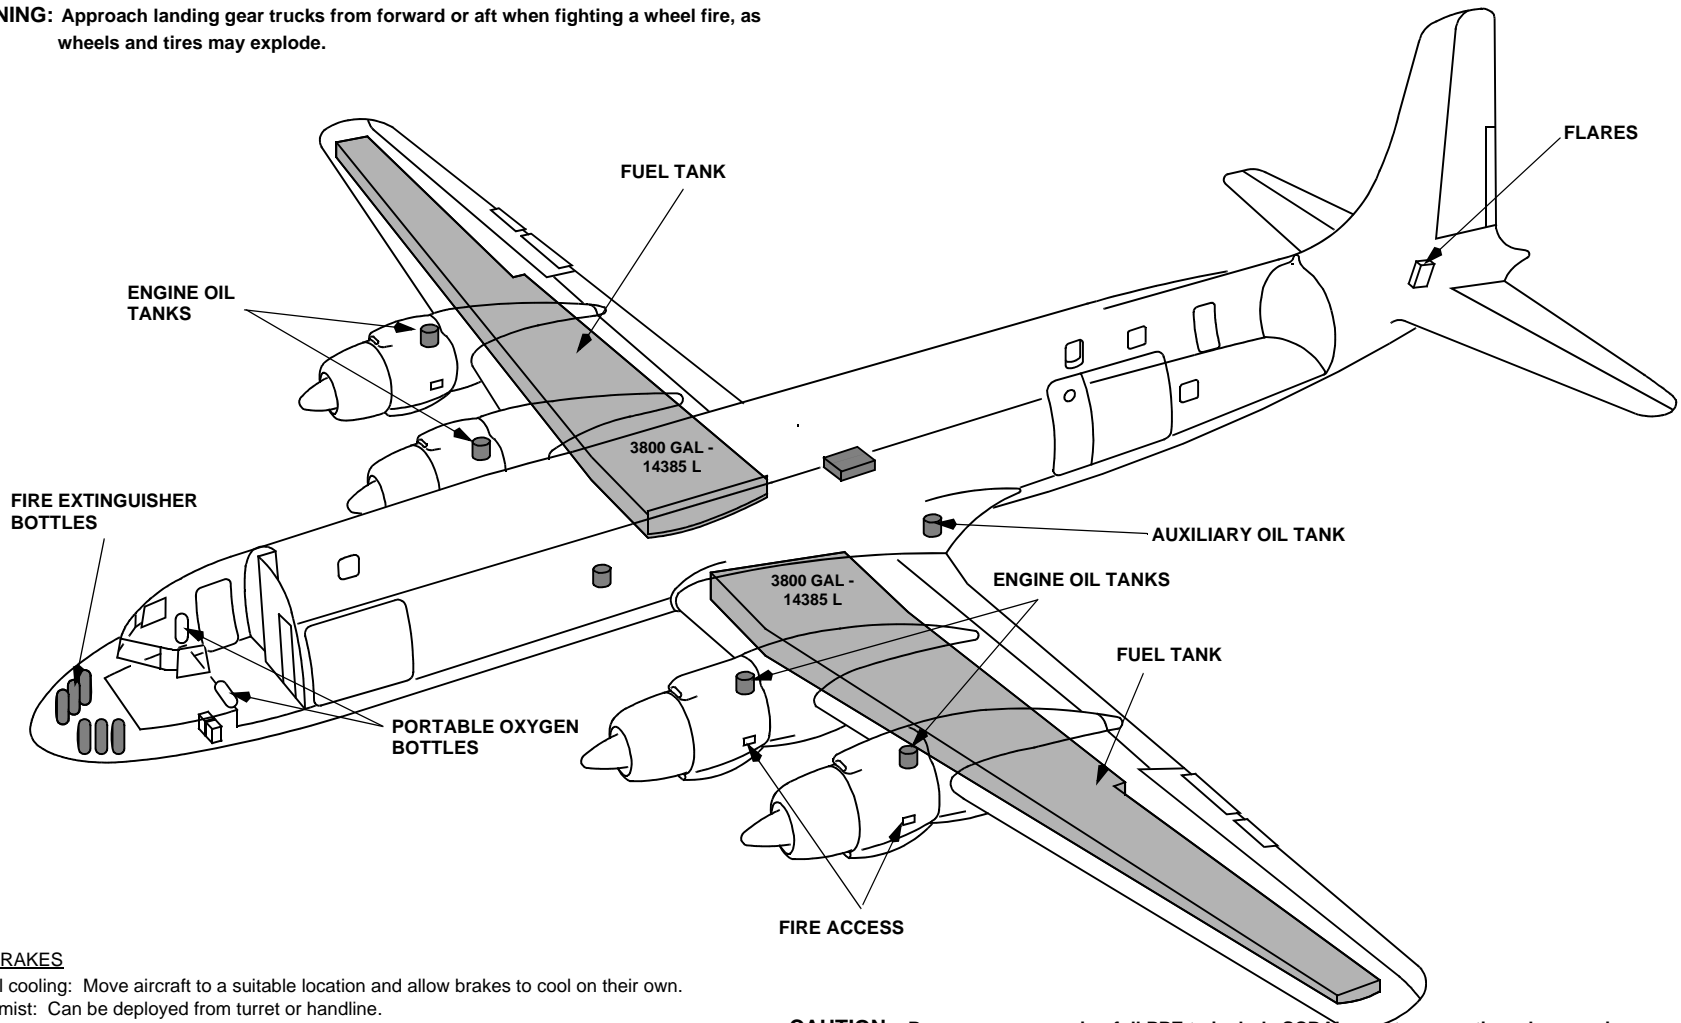

**HOT BRAKES**

Normal cooling: Move aircraft to a suitable location and allow brakes to cool on their own.  
 Water mist: Can be deployed from turret or handline.  
 Fans: Placing fans may place firefighters very close to the hazard zone.

**WHEEL FIRE**

Apply large amounts of water initially with turrets. Transition to handline application to continue and maintain a cooling effect.  
**Wheels are equipped with fusible plugs designed to melt and deflate the tire when the temperature is excessive.**

**CAUTION:** Rescue crews wearing full PPE to include SCBA's must use caution when moving across sections of aircraft that have been exposed to fatigue or fire as the result of an accident. Crews need to verify the integrity of the surface area before moving their weight and equipment across it. Signs could include but are not limited to deformity of structure, visual signs of flame impingement or uneven surfaces. Surface integrity can be checked with a pike pole, axe or any instrument used to sound surfaces for integrity.

## DC-7 FREIGHTER SERIES

## EMERGENCY RESCUE ACCESS-1


### 1 CREW AND MAIN CABIN DOORS EXTERNAL HANDLE



TO OPEN DOOR:

1. ROTATE HANDLE COUNTERCLOCKWISE.
2. PULL DOOR OUTWARD.


### 2 EMERGENCY EXIT DOORS EXTERNAL HANDLE



TO OPEN DOOR:

1. PULL HANDLE OUT.
2. PUSH DOOR INWARD.


### 3 ESCAPE HATCH EXTERNAL HANDLE

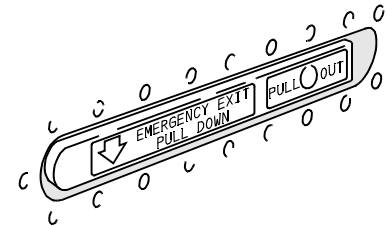

TO OPEN HATCH:

1. PULL HANDLE OUT.
2. ROTATE HANDLE COUNTERCLOCKWISE.
3. PULL HATCH OUT.

### 4 CHOP OUT AREAS

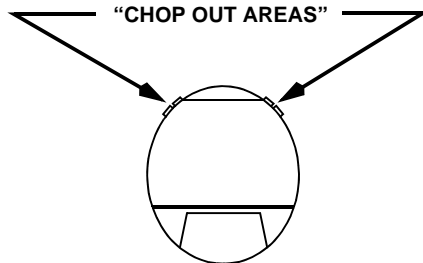


NOTE: "CHOP OUT" AREAS REQUIRE METAL CUTTING PORTABLE POWER EQUIPMENT. BECAUSE OF TYPE OF STRUCTURE AND POSSIBLE INJURY TO PERSONNEL WITHIN, IT IS RECOMMENDED THAT MAJOR EFFORT TO GAIN ACCESS BE DIRECTED TO HATCHES AND DOORS. URGENCY OF SITUATION WILL DICTATE NECESSITY FOR "CHOP OUT."

DC-7 FREIGHTER SERIES

EMERGENCY RESCUE ACCESS-2

■ 2" WIDE BAND OF CONTRASTING COLOR INDICATING ALL DOORS, HATCHES AND WINDOWS EXTERNALLY OPERABLE

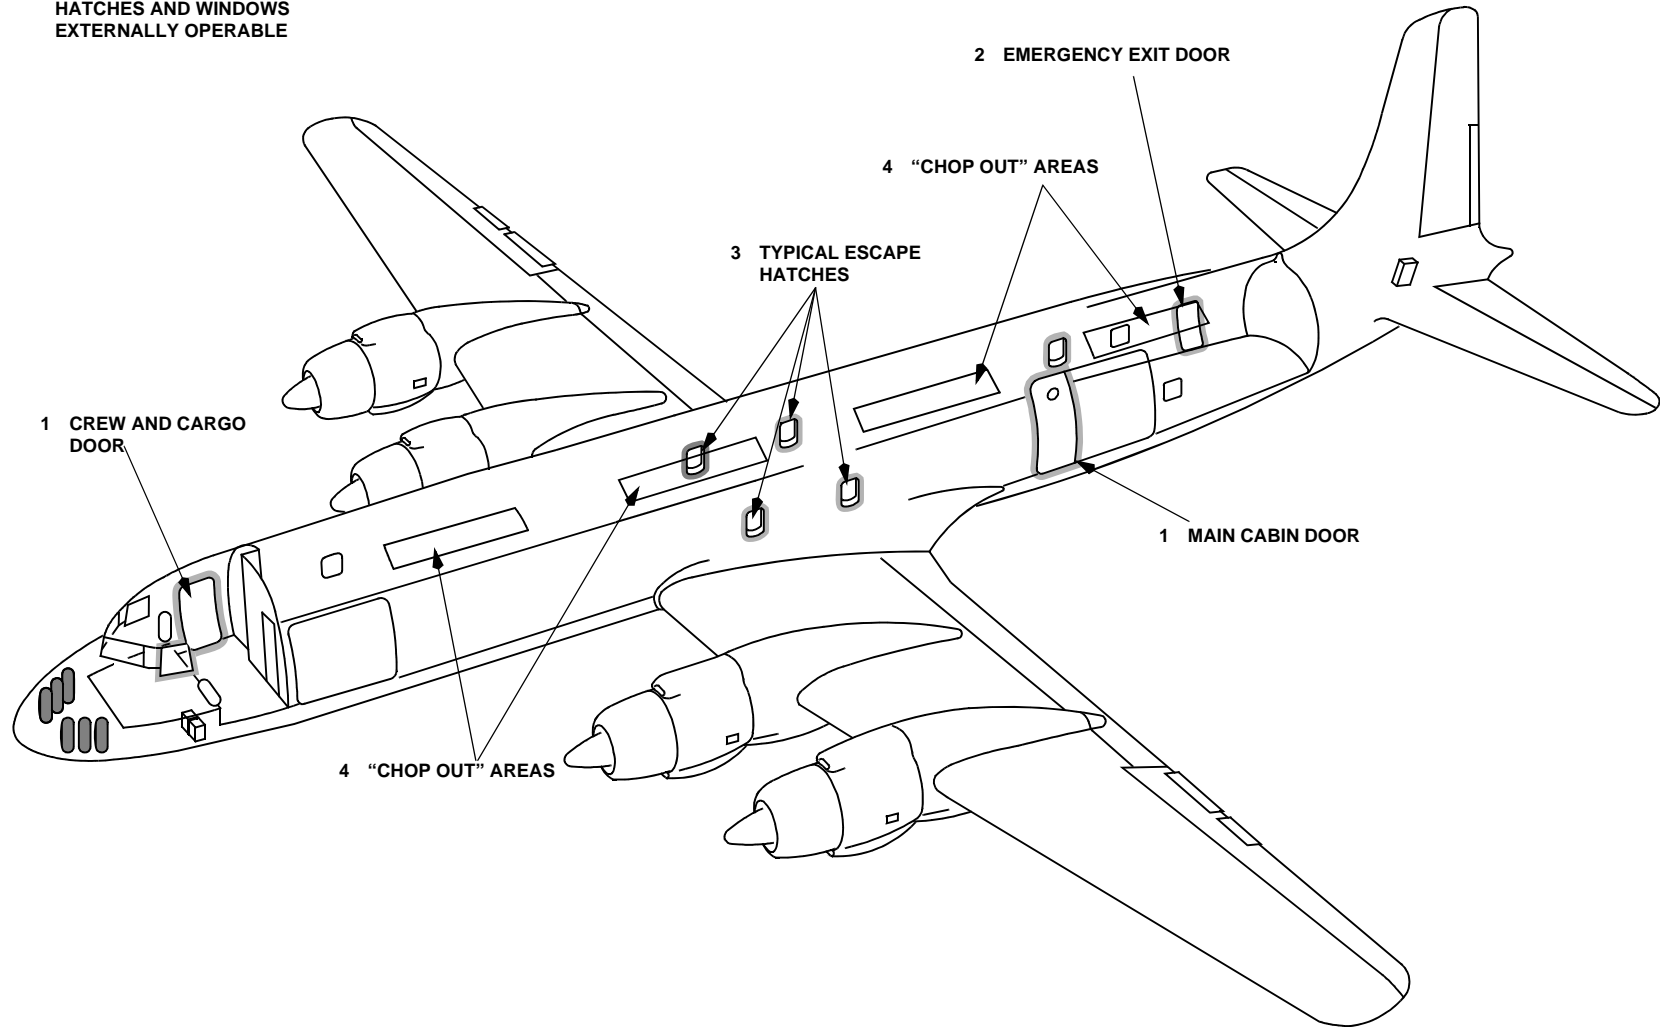

## **DC-7 FREIGHTER SERIES**

**Intentionally Blank**